




www.eng.com.tw

# Type-C Power Delivery Adapter

18W~60W



WALL-MOUNT  
(Foldable Type)



**Features:**

- IEC/EN/UL/CUL 62368 & 60950
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- CEC,DoE Level VI,ErP Stage 2,CoC Tier 2,GEMS
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,CB,CE,FCC,CCC,PSE,RCM

**Dimension:**



Model No.	O/P Voltage	O/P Current	O/P Watts
TYPE-C18IC (48*48*28mm)	5V	3.0A	15.0W
	9V	2.0A	18.0W
	12V	1.5A	18.0W
TYPE-C30IC (53*53*28mm)	5V	3.0A	15.0W
	9V	3.0A	27.0W
	12V	2.5A	30.0W
	15V	2.0A	30.0W
TYPE-C45IC (58*58*29mm)	5V	3.0A	15.0W
	9V	3.0A	27.0W
	12V	3.0A	36.0W
	15V	3.0A	45.0W
TYPE-C60IC (65.5*65.5*29mm)	5V	3.0A	15.0W
	9V	3.0A	27.0W
	12V	3.0A	36.0W
	15V	3.0A	45.0W
	20V	3.0A	60.0W

**Specification:**

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	500mA 800mA 1.3A
	Leakage Current	< 0.25mA
Others Protection	Start up time	< 3000mS @115VAC Full Load
	Rise time	<100mS
	Hold up time	>15mS @ 230Vac/50Hz input
	Protection	OCP/OVP/SCP
	Cooling	Natural Convection Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+70°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
M.T.B.F	50K Hours MIL-HDBK-217F @115VAC/ 230VAC Full Load Ambient : 25°C	
Safety Regulation	UL 62368-1, CSA C22.2 No.62368-1, IEC62368-1, EN62368-1	
	UL 60950-1, CSA C22.2 No.60950-1, IEC60950-1, EN60950-1	
EMC	EMI	FCC CFR 47 PART 15B, EN55032, EN61000-3
	EMS	EN55024(EN61204-3), EN61000-4
Energy Efficiency	Average active efficiency	> 88% Min @ 230Vac / 50Hz input
	Efficiency at low load (10 %)	> 78% Min @ 230Vac / 50Hz input
	No-load power consumption	> 0.21W Min @ 230Vac / 50Hz input

英格爾科技股份有限公司  
ENG ELECTRIC CO.,LTD.

台灣桃園市龜山區民生北路1段536號5樓  
5F., No. 536, Sec. 1, Minsheng N. Rd.,  
Gueishan Dist., Taoyuan City 33393,  
Taiwan (R.O.C.)



TEL:886-3-212-1122

FAX:886-3-212-1570

E-mail:eng@eng.com.tw

http://www.eng.com.tw






www.eng.com.tw

# Type-C Power Delivery Adapter


## S-1926 65W WALL-MOUNT (Foldable type)



### Features:

- IEC/EN/UL/CUL 62368 & 60950
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- CEC,DoE Level VI,ErP Stage 2,CoC Tier 2,GEMS
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,CB,CE,FCC,CCC,PSE,RCM

### Dimension:

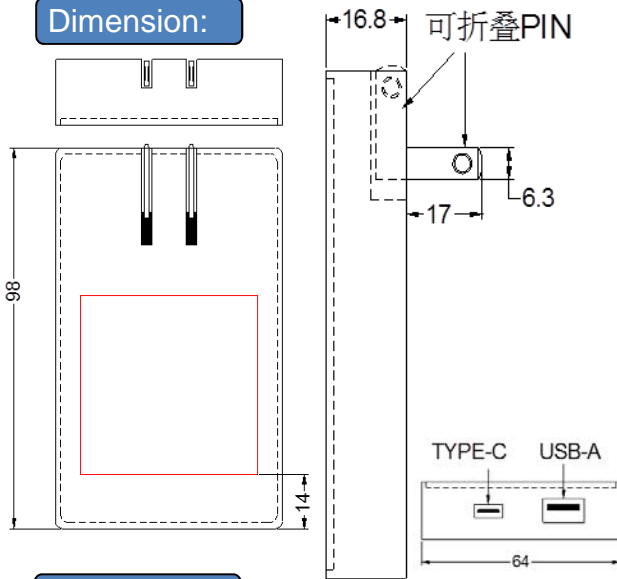

Model No.	O/P Voltage	O/P Current	O/P Watts
Only USB-A (QC18W max)	5V	2.4A	12.0W
	9V	2.0A	18.0W
	12V	1.5A	18.0W
Only USB-C (PD65W max)	5V	3.0A	15.0W
	9V	3.0A	27.0W
	12V	3.0A	36.0W
	15V	3.0A	45.0W
USB-A	20V	3.25A	65.0W
	5V	2.4A	12.0W
USB-C (PD45W max)	5V	3.0A	15.0W
	9V	3.0A	27.0W
	12V	3.0A	36.0W
	15V	3.0A	45.0W
	20V	2.25A	45.0W

### Specification:

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	1.5A
	Leakage Current	< 0.25mA
Others Protection	Start up time	< 3000mS @115VAC Full Load
	Rise time	<100mS
	Hold up time	>15mS @ 230Vac/50Hz input
	Protection	OCP/OVP/SCP
Environment	Cooling	Natural Convection Cooling
	Temperature	Operating: 0~40°C;Storage: -10~+70°C
M.T.B.F	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
	50K Hours MIL-HDBK-217F @ 115VAC/ 230VAC Full Load Ambient : 25°C	
Safety Regulation	UL 62368-1, CSA C22.2 No.62368-1, IEC62368-1, EN62368-1	
	UL 60950-1, CSA C22.2 No.60950-1, IEC60950-1, EN60950-1	
EMC	EMI	FCC CFR 47 PART 15B, EN55032, EN61000-3
	EMS	EN55024(EN61204-3), EN61000-4
Energy Efficiency	Average active efficiency	> 88% Min @ 230Vac / 50Hz input
	Efficiency at low load (10 %)	> 78% Min @ 230Vac / 50Hz input
	No-load power consumption	> 0.21W Min @ 230Vac / 50Hz input

英格爾科技股份有限公司  
ENG ELECTRIC CO.,LTD.

台灣桃園市龜山區民生北路1段536號5樓  
5F., No. 536, Sec. 1, Minsheng N. Rd.,  
Gueishan Dist., Taoyuan City 33393,  
Taiwan (R.O.C.)



TEL:886-3-212-1122

FAX:886-3-212-1570

E-mail:eng@eng.com.tw

http://www.eng.com.tw

