




# AC-DC 60W

## 6A-651DAXX




DESKTOP  
(AC Inlet C8)



**Features:**

- IEC/EN/UL/CUL 62368 & 60950
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- Output Peak Current 5A
- 100% burn in test
- 1 year warranty
- CEC, DoE Level VI, ErP Stage 2, CoC Tier 2, GEMS
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL, CB, CE, FCC, CCC, RCM, PSE

**Dimension:**

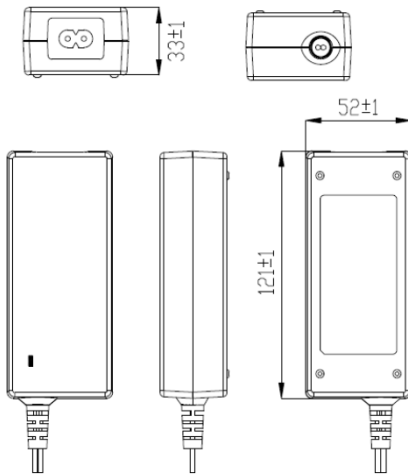

Model No.	O/P Voltage	O/P Current	O/P Watts
6A-651DA24	24.0V	2.5A	60.0W

**Specification:**

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	1.5A
	Leakage Current	< 0.25mA
Others Protection	Start up time	< 3000mS @ 115VAC Full Load
	Rise time	<20mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Protection	OCP/OVP
	Cooling	Natural Convection Cooling
	Peak Current (Keep Time)	Peak current 5A , keep times>10 seconds
Environment	Temperature	Operating: 0~40°C; Storage: -10~+70°C
	Humidity	Operating: 20%~85%; Storage: 10%~95%(Non Condensing)
M.T.B.F	50k Hours MIL-HDBK-217F @ 115VAC/ 230VAC Full Load Ambient : 25°C	
Safety Regulation	UL 62368-1, CSA C22.2 No.62368-1, IEC62368-1, EN62368-1	
	IEC60950-1, EN60950-1	
EMC	EMI	FCC CFR 47 PART 15B, EN55032, EN61000-3
	EMS	EN55035, EN61000-4
Energy Efficiency	Average active efficiency	> 88% Min @ 230Vac / 50Hz input
	Efficiency at low load (10 %)	> 78% Min @ 230Vac / 50Hz input
	No-load power consumption	> 0.21W Min @ 230Vac / 50Hz input

英格爾科技股份有限公司  
ENG ELECTRIC CO.,LTD.

台灣桃園市龜山區民生北路1段536號5樓  
5F., No. 536, Sec. 1, Minsheng N. Rd.,  
Gueishan Dist., Taoyuan City 33393,  
Taiwan (R.O.C.)



TEL:886-3-212-1122 FAX:886-3-212-1570 E-mail:eng@eng.com.tw http://www.eng.com.tw

